# **ACHIEFTEC**

PSU GUIDE Q2/2024















**PSU** stands for **POWER SUPPLY UNIT** and plays a decisive and vital role in every PC configuration since it is "the heart" of your PC.

The installed components of your PC have different levels of power (electricity) consumption, voltages, efficiencies and connectors which are managed & serviced by the **POWER SUPPLY UNIT.** 

Therefore, it is important to choose the right **POWER SUPPLY UNIT** for your PC, based on the intended applications to be run.

Applications could include: Gaming, mining, workstation/servers, office PCs, home PCs, POS systems, etc...





**POWER SUPPLY UNITs** come in different formats, pending on the chassis format they are to be installed into. Most popular ones include:

• ATX →

Size: 140 mm (160mm) x 150 mm x 86 mm

Wattages: 350W – 1450W

• SFX →

Size: 125 mm x 100 mm x 64 mm

Wattages: 250W –650W

• TFX →

Size: 175 mm x 85mm x 64 mm

Wattages: 250W – 400W

External Power Adapter

Wattages: 85W & 120W











#### **EFFICIENCY DEFINITION:**


Products are defined as "EFFICIENT", if they have 80% or more energy efficiency at 20%, 50% and 100% load and a power factor of at least 0.9 at 100% load.

#### **ADVANTAGE:**

Pending on the efficiency level of the product, 20% or less electric energy is dissipated/lost in form of heat at specified load levels thereby reducing electricity use/consumption and resulting in much cheaper/lower bills, not to oversee the environmental advantages.

#### **EFFICIENCY LEVELS:**

Percentage of rated load	10%	20%	50%	100%
80 Plus		80%	80%	80%
80 Plus Bronze		82%	85%	82%
80 Plus Silver		85%	88%	85%
80 Plus Gold		87%	90%	87%
80 Plus Platinum		90%	92%	89%
80 Plus Titanium	90%	92%	94%	90%

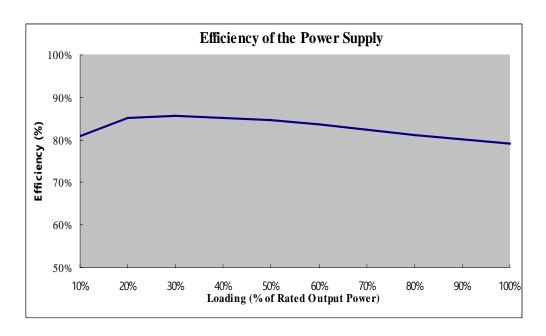



















#### **ATX 3.0 DEFINITION:**

ATX 3.0 is a new power standard announced by Intel in 2022. The new standard upgrades the 12VHPWR power supply interface of the graphics card, using 12+4 pins, and the maximum power supply can reach 600W, which is mainly used to meet the power supply requirements of PCIe 5.0 graphics cards.

Increase the peak power supply in the blink of an eye, 10% duty cycle, 100 microseconds, and undertake 200% index efficiency.

Duty Cycle	Time for Power Excursion (T <sub>E</sub> )		me Constant (T <sub>C</sub> )	Power @ T <sub>E</sub>	@ Tc
10%	100 µs		900 µs	2000 W	817 W
20%	1 ms		4 ms	1800 W	663 W
25%	10 ms		30 ms	1600 W	693 W
50%	100 ms		100 ms	1200 W	749 W
Output	Range	Min	Nom	Max	Unit
+12V1DC2	+5% / -7%	+11.20	+12.00	+12.60	V
+12V2DC <sup>2</sup>	+5% / -7%	+11.20	+12.00	+12.60	V
+5VDC	±5%	+4.75	+5.00	+5.25	V
+3.3VDC	±5%	+3.14	+3.30	+3.47	V
-12VDC <sup>3</sup>	±10%	-10.80	-12.00	-13.20	V
+5VSB	±5%	+4.75	+5.00	+5.25	V

Output	12VH	without PCIe* PWR Connectors Size ≤450 Watts)	PSU with PCIe* 12VHPWR Connector (Rated Size >450 Watts)			
All +12V		2.5 A/µs	5.0 A/µs			
+5V		1.0 A/µs	1.0 A/	μs		
+3.3V		1.0 A/µs	1.0 A/µs			
+5VSB		0.1 A/µs	0.1 A/	μs		
-12V		0.1 A/µs	0.1 A/	μs		
Power Ex % of PSU R PSU ≤ 450 PSUs wi 12VHPWR C	Watts & thout	Power Excursion % of PSU Rated Size PSU > 450 Watts & 12VHPWR Connector present	Time for Power Excursion (TE)	Testing Duty Cycle		
100	%	100%	Infinite			
110	%	120%	100 ms	50%		
135	%	160%	10 ms	25%		
145	%	180%	1 ms	20%		
150%		200%	100 µs	10%		



#### PCIe GEN 5.0 12VHPWR DEFINITION:

INTEL calls the 4 pins of 12VHPWR SIDEBAND SIGNALS, power supply manufacturers can set 150W / 300W / 450W / 600W four power levels to control and tell the graphics card the highest (auxiliary) power it can get from it .

Pending on the efficiency level of the product, 20% or less electric energy is dissipated/lost in form of heat at specified load levels thereby reducing electricity use/consumption and resulting in much cheaper/lower bills, not to oversee the environmental advantages.

- All 12 Power Contacts Rated up to 9.2A
- Completely separate terminals




PCIe* AIC Power (W)	CPU Continuous Power (W)	Rest of Platform (W)	PSU Rated PSU Size (W)	
75	275	100	450	
150	300	100	550	
225	300	125	650	
300	300	150	750	
450	300	250	1000	
600	300	300	1200	

Sense0	Sense1	Initial Permitted Power at System Power Up	Maximum Sustain Power after Software Configuration
Gnd	Gnd	375 W	600 W
Open	Gnd	225 W	450 W
Gnd	Open	150 W	300 W
Open	Open	100 W	150 W









**4PIN 12V** → CPU power connector (P4 power connector) ATX 12V power connectors on motherboards. For most computers, you will just need to connect a single 4 pin connector.



**8PIN EPS (4+4) 12V** A hybrid of the 4 PIN ATX12V and EPS 12V connectors that can be split in half or combined to accommodate either the EPS 12V Socket or the ATX 12V socket. Provides additional power to the CPU.



**6PIN PCIe**→ PCI Express power cable used to power GPUs/graphic cards with higher power demand.



**8PIN PCIe (6+2)** → PCI Express power cable used to power premium GPUs/graphic cards with high power demand.



**16PIN PCIe GEN 5→** 12VHPWR Cable Plug Connector used to power premium GPUs/graphic cards with high power demand



Molex → power connector for IDE HDDs & ODDs. Although old standard, MOLEX can be hijacked with adapters to provide SATA, 8PIN PCIe or 8PIN EPS 12V additional connectors.



SATA→ Serial-ATA power cable connectors for SATA HDDs/SSDs and ODDs



**Floppy** → FFD for floppy drives. Basically not required anymore.

#### **NOTE:**

the amount and types of connectors on a PSU determine the amount and type of mainboards, add-on cards and peripherals that can be installed and what technology is compatible.



## **PERFORMANCE POWER SUPPLIES**

UNIQUE FAN GRILL
JAPANESE CAPACITORS
MAXIMUM EFFICIENCIES
MAX. ACCESSORIES INSIDE
DOUBLE FWD. PCB TECHNOLOGY
xTRA LONG BLACK & FLAT CABLES
MAXIMUM PROTECTION FEATURES
NON-AUDIBLE BALL & FDB-BEARING FANS
BUILT FOR GAMING & ABSOLUTE HIGH PERFORMANCE

















Models: PPS-1300FC-A3\*(New)

- DESIGNED TO INTEL'S ATX 3.0 STANDARD
- **SUPPORTS PCIe GEN 5**
- GAMING/HIGH PERFORMANCE
- **80PLUS PLATINUM**
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm BALL BEARING (silent) FAN
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC Half-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	16PIN PCIe GEN5	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
PPS-1300FC	1	12	4	1	Х	6	2	1







































### PowerUP GOLD (PERFORMANCE) series

Models: GPX-550FC, GPX-650FC, GPX-750FC & GPX-850FC

- GAMING/HIGH PERFORMANCE
- **80PLUS GOLD**
- JAPANESE CAPs.
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm FDB (silent) FAN
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC full bridge resonant design
- DC to DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPX-550FC	1	6	3	Х	Х	2	2	1
GPX-650FC	1	9	3	Х	Х	2	2	1
GPX-750FC	1	9	3	Х	Х	4	2	1
GPX-850FC	1	9	3	Х	Х	6	2	1

























Models: BDK-550FC, BDK-650FC, BDK-750FC & BDK-850FC

- GAMING/HIGH PERFORMANCE
- **80PLUS GOLD**
- JAPANESE CAPs.
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 12cm FDB (silent) FAN
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC half bridge resonant design
- DC to DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
BDK-550FC	1	6	3	Х	Х	2	2	1
BDK-650FC	1	6	3	Х	х	4	2	1
BDK-750FC	1	6	3	Х	Х	4	2	1























Models: CPX-750FC & CPX-850FC\*(New)

### **Unique Selling Points:**

- DESIGNED TO INTEL'S ATX 3.0 STANDARD
- **SUPPORTS PCIe GEN 5**
- GAMING/HIGH PERFORMANCE
- **80PLUS GOLD**
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 12cm (silent) FAN
- ECO Fan: Smart Fan Control
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- SRC Full-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	16PIN PCIe GEN5	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
PPS-750FC	1	9	4	1	Х	4	2	х
PPS-850FC	1	9	4	1	Х	4	2	X



ATMOS



























Models: PPS-850FC-A3, PPS-1050FC-A3 & PPS-1250FC-A3\*(New)

- DESIGNED TO INTEL'S ATX 3.0 STANDARD
- **SUPPORTS PCIe GEN 5**
- GAMING/HIGH PERFORMANCE
- **80PLUS GOLD**
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm BALL BEARING (silent) FAN
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC Half-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	16PIN PCIe GEN5	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
PPS-850FC	1	12	4	1	Х	2	2	Х
PPS-1050FC	1	12	4	1	Х	4	2	Х
PPS-1250FC	1	12	4	1	х	4	2	х































Models: PPS-550FC, PPS-650FC, PPS-750FC, PPS-850FC, PPS-1050FC & PPS-1250FC



- **GAMING/HIGH PERFORMANCE**
- **80PLUS GOLD**
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- 14cm BALL BEARING (silent) FAN
- SECURITY FEATURES: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- LLC Half-Bridge converter with DC-to-DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
PPS-550FC	1	6	3	Х	Х	2	2	1
PPS-650FC	1	6	3	Х	Х	4	2	1
PPS-750FC	1	8	3	Х	х	4	2	1
PPS-850FC	1	12	4	Х	х	4	2	Х
PPS-1050FC	1	12	6	Х	х	6	2	X
PPS-1250FC	1	12	6	Х	х	6	4	х





















### **CORE (PERFORMANCE)** series

Models: BBS-500S, BBS-600S & BBS-700S



- GAMING/HIGH PERFORMANCE
- **80PLUS GOLD**
- RETAIL (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- **DIRECT CABLES**
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- LLC half bridge resonant design & DC to DC technology
- +12V Single Rail technology

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	<b>6PIN PCIe</b>	8PIN PCIe (6+2)	<b>8PIN EPS (4+4)</b>	Floppy
BBS-500S	1	4	3	Х	Х	1	1	1
BBS-600S	1	6	3	Х	х	2	1	1
BBS-700S	1	6	3	Х	Х	2	2	1

















### **PROTON (PERFORMANCE)** series





- GAMING/HIGH PERFORMANCE
- **80PLUS BRONZE**
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR for all "C" models
- DC-2-DC technology
- Xtra long & flat uni-color cables
- 14cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP


















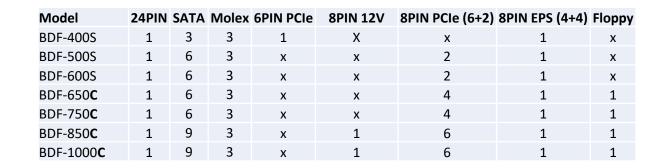







### **SILICON (PERFORMANCE)** series

Models: SLC-650C, SLC-750C, SLC-850C & SLC-1000C

- GAMING/HIGH PERFORMANCE
- **80PLUS BRONZE**
- RETAIL (incl. Pwr cord + accessories)
- 100% MODULAR
- DC-2-DC technology
- Xtra long & flat uni-color (black) cables
- 14cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP





Model	24PIN	SATA	Molex	6PIN PCIe	8PIN PCIe (6+2)	8PIN 12V	8PIN EPS (4+4)	Floppy
SLC-650C	1	6	3	Х	4	Х	1	1
SLC-750C	1	6	3	Х	4	Х	1	1
SLC-850C	1	9	3	Х	6	1	1	1
SLC-1000C	1	9	3	Х	6	1	1	1















### A – 90 (PERFORMANCE) series




- **GAMERS/ENTHUSIASTS**
- 90% EFFICIENCY @230V (equivalent to 80PLUS GOLD)
- RETAIL (incl. Pwr cord + accessories)
- **SEMI MODULAR**
- 14cm (silent) Fan (+5V addressable)
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Double forward design & DC to DC technology
- +12V Single Rail technology































Models: GDP-650C-RGB & GDP-750C-RGB

- **GAMERS/ENTHUSIASTS**
- 90% EFFICIENCY @230V (equivalent to 80PLUS GOLD)
- RETAIL (incl. Pwr cord + accessories)
- **SEMI MODULAR**
- 14cm (RGB) (silent) Fan (+5V addressable)
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Double forward design & DC to DC technology
- +12V Single Rail technology
- **RGB**: supports all renowned **RGB** lightening synchronization systems such as ASUS™ AURA SYNC, MSI™ MYSTIC LIGHT SYNC, ASROCK™ POLYCHROME SYNC and GIGABYTE™ RGB FUSION.

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	<b>8PIN EPS (4+4)</b>	Floppy
GDP-650C-RGB	1	6	3	Х	Х	4	1	1
GDP-750C-RGB	1	8	3	Х	Х	4	1	1














### PHOTON (RGB) series



- **GAMERS/ENTHUSIASTS**
- 85% EFF@230V (equivalent to 80PLUS BRONZE)
- RETAIL (incl. Pwr cord + accessories)
- **SEMI MODULAR**
- 12cm (RGB) (silent) Fan (+5V addressable)
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- RETAIL
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- **RGB**: supports all renowned **RGB** lightening synchronization systems such as ASUS™ AURA SYNC, MSI™ MYSTIC LIGHT SYNC, ASROCK™ POLYCHROME SYNC and GIGABYTE™ RGB FUSION.























REAL POWER
RETAIL & BULK
QUALITY COMPONENTS
MAXIMUM EFFICIENCIES
EYE CATCHING RETAIL PACKING
THERMAL BOARD TECHNOLOGY
+12V SINGLE RAIL TECHNOLOGY
+3.3V MAGNETIC AMPLIFICATION
LLC HALF BRIDGERESONANT DESIGN PCB
MAINSTREAM GAMING, HOME & OFFICE













### **Eon (RETAIL)** series

Models: ZPU-600S & ZPU-700S\*(New)

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- **80PLUS EU (WHITE)**
- DIRECT CABLES (All black flat wire)
- RETAIL (incl. Pwr cord + accessories)
- Double forward design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
ZPU-400S	1	4	2	Х	Х	1	1	Х
ZPU-500S	1	4	2	Х	Х	2	2	Χ
ZPU-600S	1	4	2	Х	Х	2	2	Χ
ZPU-700S	1	4	2	Х	Х	4	2	Х















### **VOLTA (RETAIL)** series

Models: VPS-600S & VPS-700S\*(New)

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 80PLUS BRONZE
- DIRECT CABLES
- RETAIL & BULK (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- DIRECT CABLES (Xtra long MB & CPU cables 650mm)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Double forward design & DC to DC technology + Thermal board
- Security features: : UVP, OVP, SCP, OPP, OTP, AFC & SIP

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
TPS-600S	1	5	3	Х	Х	2	1	Х
TPS-700S	1	6	3	х	Х	2	1	Х





















Models: TPS-400S, TPS-500S, TPS-600S & TPS-700S

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- **80PLUS BRONZE**
- **DIRECT CABLES**
- RETAIL & BULK (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- DIRECT CABLES (Xtra long MB & CPU cables 650mm)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Double forward design & DC to DC technology + Thermal board
- Security features: : UVP, OVP, SCP, OPP, OTP, AFC & SIP

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
TPS-400S	1	5	3	Х	Х	1	1	х
TPS-500S	1	5	3	Х	Х	1	1	Х
TPS-600S	1	5	3	х	Х	2	1	х
TPS-700S	1	6	3	Х	Х	2	1	Х





















### **ELEMENT (RETAIL)** series

Models: ELP-350S, ELP-400S, ELP-500S, ELP-600S & ELP-700S

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- **DIRECT CABLES**
- RETAIL & BULK (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC &SIP
- **ELP-600S** & **ELP-700S** with xtra long (650mm) **24PIN** & **EPS 12V** cables

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	<b>8PIN EPS (4+4)</b>	Floppy
ELP-350S	1	3	2	Х	Х	х	1	1
ELP-400S	1	3	2	Х	Х	1	1	1
ELP-500S	1	3	2	Х	Х	1	1	1
ELP-600S	1	4	2	Х	Х	2	1	1
ELP-700S	1	6	2	Х	Х	2	1	1














### A - 80 (RETAIL) series

Models: CTG-550C, CTG-650C & CTG-750C

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- **SEMI MODULAR**
- RETAIL (incl. Pwr cord + accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP




















# **ECO (RETAIL)** series

Models: GPE-400S, GPE-500S, GPE-600S & GPE-700S

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- **DIRECT CABLES**
- RETAIL (incl. Pwr cord + accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP





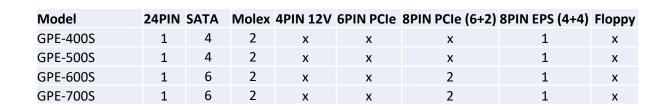

































### **FORCE (RETAIL)** series

Models: CPS-350S, CPS-400S, CPS-450S, CPS-500S, CPS-550S, CPS-650S & **CPS-750S** 

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- DIRECT CABLES
- RETAIL (incl. Pwr cord + accessories)
- Double Forward Design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
CPS-350S	1	4	2	Х	Х	х	1	Х
CPS-400S	1	4	2	Х	Х	х	1	Х
CPS-450S	1	4	2	Х	1	х	1	Х
CPS-500S	1	4	2	Х	Х	2	1	Х
CPS-550S	1	4	2	Х	Х	2	1	Х
CPS-650S	1	6	2	Х	Х	2	1	Х
CPS-750S	1	6	2	Х	Х	2	1	Х





















Models: GPS-400A8, GPS-500A8, GPS-550A8, GPS-600A8, GPS-650A8 & GPS-700A8

- HIGH VALUE HOME/GAMING & OFFICE SYSTEMS
- 85% EFFICIENCY @230V (equivalent to 80PLUS BRONZE)
- **DIRECT CABLES**
- RETAIL (incl. Pwr cord + accessories) & BULK (excl. Pwr cord & accessories)
- Double forward design with +3.3V magnetic amplification
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPS-400A8	1	3	2	Х	Х	1	1	1
GPS-500A8	1	3	2	Х	Х	1	1	1
GPS-550A8	1	4	2	Х	Х	2	1	1
GPS-600A8	1	4	2	Х	Х	2	1	1
GPS-650A8	1	4	2	Х	Х	2	1	1
GPS-700A8	1	6	2	Х	Х	2	1	1



REAL POWER
RETAIL & BULK
QUALITY COMPONENTS
MAXIMUM EFFICIENCIES
THERMAL BOARD TECHNOLOGY
+12V SINGLE RAIL TECHNOLOGY
+3.3V MAGNETIC AMPLIFICATION
LLC HALF BRIDGERESONANT DESIGN PCB
MAINSTREAM GAMING, HOME & OFFICE



### **SOLID (BULK/OEM)** series





- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- XTRA long CPU and MB cables (650mm)
- 400W 700W with 8PIN EPS (4+4)
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPP-400S	1	5	3	1	Х	1	х	Х
GPP-500S	1	5	3	1	Х	1	Х	Х
GPP-600S	1	5	3	1	Х	2	х	Х
GPP-700S	1	6	3	1	Х	2	х	Х

















### iARENA-II (BULK/OEM) series





- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (equivalent to 80PLUS)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPA-350S8	1	3	2	Х	Х	х	1	1
GPA-400S8	1	3	2	Х	Х	1	1	1
GPA-450S8	1	3	2	Х	Х	1	1	1
GPA-500S8	1	3	2	Х	Х	1	1	1


















### iARENA-IV (BULK/OEM) series

Models: GPB-350S, GPB-400S, GPB-450S & GPB-500S

- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (equivalent to 80PLUS BRONZE)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board





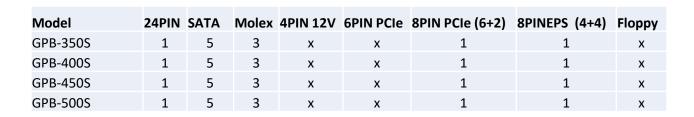













### **VALUE (BULK/OEM)** series





Models: APB-400B8 & APB-500B8

- MAIN STREAM HOME & OFFICE
- 80PLUS EU (WHITE)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
APB-400B8	1	3	2	1	1	х	х	1
APB-500B8	1	3	2	1	1	х	x	1
APB-600B8	1	4	2	х	х	2	1	1
APB-700B8	1	4	2	Х	х	2	1	1













### iARENA-III (BULK/OEM) series





- MAIN STREAM HOME & OFFICE
- 80% EFF @230V (equivalent to 80PLUS)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board






















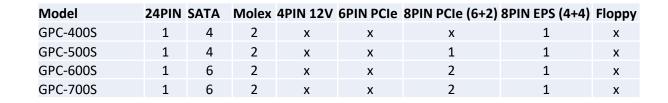





### iARENA-I (BULK/OEM) series

Models: GPA-550S, GPA-600S, GPA-650S & GPA-700S

- MAIN STREAM HOME & OFFICE
- <80% EFF @230V
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 12cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPA-550S	1	4	2	Х	Х	2	1	1
GPA-600S	1	4	2	Х	Х	2	1	1
GPA-650S	1	6	2	Х	Х	2	1	1
GPA-700S	1	6	2	Х	Х	2	1	1













SFF (small form factor) solution

REAL Power
HIGH EFFICIENCIES
QUALITY CAPACITORS
RETAIL & BULK PACKING
DC - to - DC technology
+12V SINGLE RAIL Technology
THERMAL BOARD Technology
LLC HALF BRIDGE RESONANT DESIGN PCB
GMING, PERFORMANCE, HOME & OFFICE





### **SMART (SFX PERFORMANCE)** series

Models: SFX-500GD-C

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD (SFX-500DG-C)
- RETAIL (incl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PIN	SATA	Molex	4PIN 12V	<b>6PIN PCIe</b>	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
SFX-500GD-C	1	4	2	х	Х	2	1	x





















### **SMART (SFX)** series

Models: SFX-250VS, SFX-350BS & SFX-450BS

- MAIN STREAM HOME & OFFICE
- 85% EFF @230V (SFX-XXXVS/BS)
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	<b>6PIN PCIe</b>	8PIN PCIe (6+2)	<b>8PIN EPS (4+4)</b>	Floppy
SFX-250VS	1	2	2	Χ	Х	х	1	1
SFX-350BS	1	2	2	Х	Х	х	1	1
SFX-450BS	1	4	2	Х	Х	1	1	1
SFX-500GD-C	1	4	2	Х	Х	2	1	Х

















### **SMART (BFX)** series

Models: BFX-350BS & BFX-450BS

- MAIN STREAM HOME & OFFICE
- **80PLUS BRONZE**
- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- DC to DC technologie
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PIN	SATA	Molex	4PIN 12V	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
BFX-350BS	1	3	2	Х	Х	1	1	1
BFX-450BS	1	3	2	х	Х	2	1	1













### **COMPACT (SFX PERFORMANCE)** series

Models: CSN-450C, CSN-550C & CSN-650C

- GAMING/HIGH PERFORMANCE
- 80PLUS GOLD certified
- RETAIL (incl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, OCP, OTP, AFC & SIP
- Active PFC (PF 0,9)
- Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
CSN-450C	1	6	3	Х	Х	2	1	1
CSN-550C	1	6	3	Х	Х	2	1	1
CSN-650C	1	6	3	Х	Х	2	1	1

























### **SMART (TFX)** series

Models: GPF-300P, GPF-350P & GPF-400P

- MAIN STREAM HOME & OFFICE
- **80PLUS BRONZE**
- 85% EFF @230V → GPF-350P & GPF-400P 85%



- BULK (excl. Pwr cord & accessories)
- +12V Single Rail Technology
- 8cm ball bearing (silent) fan
- Security features: UVP, OVP, SCP, OPP, AFC & SIP
- Thermal board
- Dedicated to SFF (small form factor) cases
- ATX 2.3 version

Model	24PIN	SATA	Molex	<b>4PIN 12V</b>	6PIN PCIe	8PIN PCIe (6+2)	8PIN EPS (4+4)	Floppy
GPF-300P	1	4	2	Х	Х	х	1	1
GPF-350P	1	4	2	Х	Х	х	1	1
GPF-400P	1	4	2	Х	Х	X	1	1













### PRODUCT REAEARCH & DEVELOPEMENT

## 1. pre-processing



2. plug in components



3. Initial check





## 4. wave-soldering process



5. check the soldering quality



6. in circuit test





# 10. Test after assembly



## 11. burn-in test




## 12. HI-POT test









14. cable test



15. ATE test









## 16. appearance check



17. packaging



18. out-going quality control











This powerful feature saves time and reduces significantly, human operations errors which in turn decreases failure rate due to improper tests.





Brand new soldering machine launched in 2014 to ensure clean soldering processes which increase longevity of components and related solutions

The new BURN-IN room which is used to stress-test PSUs until burning point to establisch max. values correctly.







Brand new soldering paste processes for daughter mainboards to enhance cleaner and more dependent soldering points.

The glue is a relevant aspect of the PSU so that anti water, dust and insulation glue is now implemented to enhance functionality further.








The vibration test is run on every single unit at the end of the production line to further ensure all quality standards are met.

SMD capacitors have been replaced with TDKs to boost longevity and ensure additional MTBF.

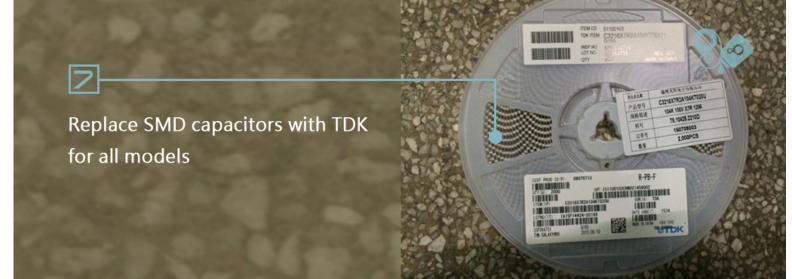





Both soldering spray and solder bars have been upgraded to very renowned brand ALPHA which ensures highest quality soldering.

Solder bars with 0,3% silver to ensure long-term soldering results and lowest possible insulation.





### **CHIEFTEC QUALITY CONTROL CENTER**

