


# DIGITUS CAT 6, Class E High Density Patch Panel, shielded, grey

DN-91624S-SL-SH-G  
EAN 4016032341383

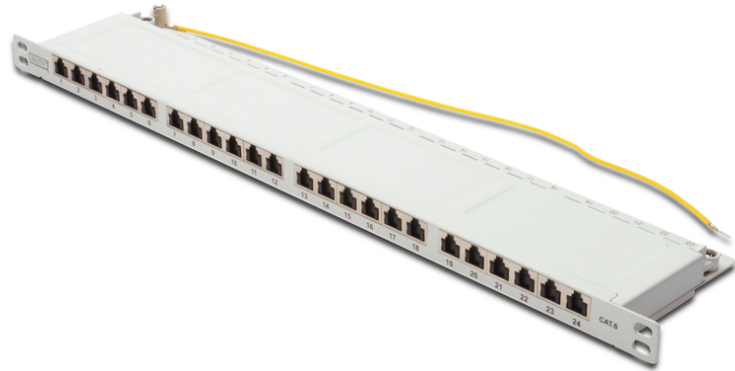

**CAT 6 Patch Panel, shielded, 24-port RJ45 w. shutter, 8P8C, LSA, 0.5U, 19" rack mount, grey**

The DIGITUS® 24-port 0.5U Patch Panel offers a high density. As the panel is only 0.5U in height, it allows to present 48 ports on 1U (2 panels with 24 ports each) which can be installed.

**Save a lot of space (only 0.5U) - With shutters for dust protection - Best performance and link quality for your network**

- Manufactured acc. to Link Performance Class E, for up to 250 MHz, EN 50173 and ISO/IEC 11801
- Shielded
- Cable installation via LSA strips, color codes based on EIA/TIA 568 A & B

- Fixing option for cable ties, central ground connection
- Suitable for 483 mm (19") rack mount
- only 0.5U
- Shutter for dust protection
- 24 RJ45 ports
- CAT 6
- Color grey (RAL 7035)
- Color: light grey, RAL 7035
- Units: 0
- Category: CAT 6
- Ports: 24

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	13.40	54.00	25.00	23.00	31,050.00
Packaging Unit Inside	1	1.34	53.00	12.00	4.00	2,544.00
Packaging Unit Single	1	1.34	53.00	12.00	4.00	2,544.00
Net single without Packaging	1	1.12	9.60	48.30	2.30	0.00

**More images:**

