



2022

PRODUCT CATALOG





CHIEFTEC - A successful story since 1994

For over 25+ years CHIEFTEC has been a world-wide renowned Brand, associated with high-quality PSU, PC cases, 19" IPC cases and Accessories manufacturing for the computer industry, servicing the global OEM, ODM and distributing (consumer) segments.

With our manufacturing plants located in Asia (China and Taiwan), we cover the entire production scope beginning with the in-house R&D, including the final assembling and ending with product distribution, marketing and positioning in the respective markets, segments and channels worldwide.

Since 1994, the ARENA ELECTRONIC GMBH solely represents the CHIEFTEC Brand and services the entire Europe, Middle East, CIS and Africa regions, with the sole aim of continuously expanding its business in evolving markets.

A 3000 square meter warehouse and a team of over 20 highly qualified professionals ensure a smooth and customer oriented technical, pre and after-sales service as well as just-on-time deliveries which is a minimum requirement in today's business environment.

In this you can trust !

C.E.O *Eddy Shih*

Class

01

ATX


mATX

ITX

19"IPC

The Cabinet
of computer

CASE

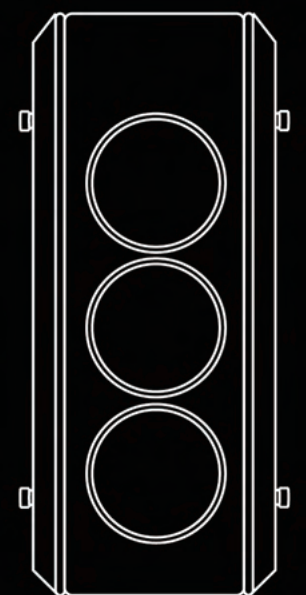



HUNTER GS-01B-OP	GS-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 2x 2.5"
Power Supply	ATX PSU (optional, ~180mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio), RGB Brightness Button, RGB Modes Button
Cooling System	Front: 3x 120mm / 2x 140mm / 1 x 280mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm
Pre-installed	4x ARGB Fans
Dimension	408mm x 210mm x 464mm
CPU Cooler Support	Max. 170mm
VGA Support	Max. 320mm



SCORPION 2 GL-02B-OP	GL-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 1x280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm
Pre-installed	4x ARGB Fans
Dimension	436mm x 202,5mm x 490mm
CPU Cooler Support	166mm
VGA Support	349mm



SCORPION 3 GL-03B-OP	GL-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 1x280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm
Pre-installed	4x ARGB Fans
Dimension	436mm x 202,5mm x 490mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



SCORPION 3 White GL-03W-OP	GL-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 1x280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm
Pre-installed	4x ARGB Fans
Dimension	436mm x 202,5mm x 490mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



SCORPION 4 GL-04B-OP	GL-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.1 (USB3.2 Gen 1), 1x USB2.0, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 1x280mm Rear: 1x 120mm Top: 2x 120mm / 1x 240mm
Pre-installed	4x ARGB Fans
Dimension	436mm x 202,5mm x 490mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



STALLION 2 GP-02B-OP	GP-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 4x 2.5"
Power Supply	ATX PSU (optional, ~220mm)
Front I/O	2x USB3.2 Gen 1, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Brightness Button, Fan Speed Control Button
Cooling System	Front: 1x 180mm / 3x 120mm / 1 x 360mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 1 x 240mm
Pre-installed	4x ARGB Fans
Dimension	572mm x 210mm x 520mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 430mm



STALLION 3 GP-03B-OP	GP-
M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 4x 2.5"
Power Supply	ATX PSU (optional, ~200mm)
Front I/O	2x USB3.2 Gen 1, 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In, RGB Brightness Button, Fan Speed Control Button
Cooling System	Front: 1x 180mm / 3x 120mm / 1 x 360mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 1 x 240mm
Pre-installed	4x ARGB Fans
Dimension	572mm x 210mm x 520mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 430mm





AS-01B-OP

AS-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	int.:2x 3.5", 2x 2.5"
Power Supply	ATX PSU (Optional, ~ 180mm)
Front I/O	2x USB3.2 Gen 1, 1x USB 2.0, Audio-out (AZALIA / HD-Audio, Mic-in)
Cooling System	Front: 3x 120mm / 2x 140mm / 1x 280mm Rear: 1x 120mm Top: 2x 120mm / 2x140mm
Pre-installed	1x 120 PWM Fans
Dimension	405mm x 212mm x 462mm
CPU Cooler Support	Max. 170mm
VGA Support	Max. 320mm



CM-25B-OP

CM-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:4x 5.25" ,1x 3.5" / int.:3x 3.5" , 1x 2.5"
Power Supply	ATX PSU (Optional)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	490mm x 198mm x 437mm
CPU Cooler Support	Max. 165mm
VGA Support	280mm / 400mm (HDD cage removed)



HAWK AL-02B-OP

AL-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:1x 5.25" / int.:2x 3.5" , 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In , Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 1 x 240mm Rear: 1x 120mm
Dimension	435mm x 202mm x 450mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



BM-25B-OP

BM-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:3x 5.25" ,1x 3.5" / int.:3x 3.5" ,1x 2.5"
Power Supply	ATX PSU (Optional)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-In, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 90mm / 1x 120 mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	491mm x 198mm x 437mm
CPU Cooler Support	Max. 165mm
VGA Support	280 / 400 mm (HDD cage removed)



HAWK AL-02B-TG-OP

AL-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:1x 5.25" / int.:2x 3.5" , 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Mic-In , Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 3x 120mm / 2x 140mm / 1 x 240mm Rear: 1x 120mm
Dimension	435mm x 200mm x 450mm
CPU Cooler Support	Max. 166mm
VGA Support	Max. 349mm



LF-02B-OP

LF-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:2x 5.25" , 1x 3.5" / int.: 4x 3.5" ,1x 2.5"
Power Supply	ATX (optional)
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0 Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 120mm Bottom: 1x 120mm Side: 2x 120mm
Dimension	487mm x 200mm x 430mm (Stand +15mm)
CPU Cooler Support	Max. 165mm
VGA Support	Max. 320mm



CW-01B-OP

CW-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:3x 5.25" , 1x 3.5" / int.:7x 3.5" , 7x 2.5"
Power Supply	ATX PSU (optional)
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-In, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 2x 120mm Rear: 1x 120mm Top: 2x 120mm / 2x 140mm / 1x280mm Bottom: 1x 120mm or 140mm fan (depending on PSU length)
Dimension	490mm x 210mm x 471mm (stand +21mm)
CPU Cooler Support	Max. 165mm
VGA Support	270mm / 410mm (HDD cage removed)



CG-04B-OP

CG-

M/B Support	Mini ITX, mATX, ATX
Drive Bay	ext.:2x 5,25" , 1x 3,5" / int.:2x 3,5" , 1x 2,5"
Power Supply	ATX (optional)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0 Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1 x 90 mm / 1 x 120 mm Rear: 2x 80mm Side: 2x 120mm
Dimension	484mm x 180mm x 404mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 380mm



LG-01B-OP		LG-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.:2x 5.25" , 1x 3.5" / int.:2x 3.5" , 1x 2.5"	
Power Supply	ATX (optional)	
Front I/O	2x USB 2.0, 1x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)	
Cooling System	Front: 1x 80mm / 1x 90 mm / 1x 120mm Bottom: 2x 80mm Side: 2x 120mm	
Dimension	484mm x 180mm x 404mm (stand +3mm)	
CPU Cooler Support	Max. 140mm	
VGA Support	Max. 380mm	



UK-02B-OP		UK-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.:1x 5.25" / int.:2x 3.5" , 1x 2.5"	
Power Supply	ATX PSU (optional, 140mm - 200mm)	
Front I/O	2x USB3.0(USB3.1 Gen 1), 1x USB Type C (480Mbit/s), Mic-in, Audio-out (AZALIA / HD-Audio)	
Cooling System	Front: 2x 120mm Rear: 1x 80mm	
Dimension	380mm x 227mm x 342mm (Stand +17mm)	
CPU Cooler Support	Max. 110mm	
VGA Support	290 mm / 315 mm (Without front fan)	



HC-10B-OP		HC-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.: 3x 5.25" , 1x 3.5" / int.: 4x 3.5" , 1x 2.5"	
Power Supply	ATX PSU (optional)	
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, 1x USB 2.0 Type C (480 Mbit/s), Mic-in, Audio-out (AZALIA / HD-Audio)	
Cooling System	Front: 1x 120mm / 1x 90mm / 1x 80mm Rear: 1x 120mm / 1x 90mm / 1x 80mm	
Dimension	450mm x 185mm x 412mm (Stand+8mm)	
CPU Cooler Support	Max. 155mm	
VGA Support	250mm / 380mm (HDD cage removed)	



UK-02W-OP		UK-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.:1x 5.25" / int.:2x 3.5" , 1x 2.5"	
Power Supply	ATX PSU (optional, 140mm - 200mm)	
Front I/O	2x USB3.0(USB3.1 Gen 1), 1x USB Type C (480Mbit/s), Mic-in, Audio-out (AZALIA / HD-Audio)	
Cooling System	Front: 2x 120mm Rear: 1x 80mm	
Dimension	380mm x 227mm x 342mm (Stand +17mm)	
CPU Cooler Support	Max. 110mm	
VGA Support	290 mm / 315 mm (Without front fan)	



CQ-01B-U3-OP		CQ-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.:2x 5.25" , 1x 3.5" / int.:3x 3.5"	
Power Supply	ATX PSU (optional)	
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)	
Cooling System	Front: 1x 120mm Rear: 2x 80mm Side: 2x 120mm	
Dimension	428mm x 160mm x 410mm (Stand +15mm)	
CPU Cooler Support	Max. 120mm	
VGA Support	Max. 250mm	



UC-03B-OP		UC-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.:1x 5.25" / int.:2x 3.5" , 2x 2.5"	
Power Supply	ATX PSU (optional)	
Front I/O	2x USB3.2 Gen 1 Audio-out (AZALIA / HD-Audio) Mic-in SD Card	
Cooling System	Rear: 2x 60mm Top: 1x 120mm Bottom: 1x 120mm Side: 1x 120mm	
Dimension	443mm x 166mm x 373mm	
CPU Cooler Support	Max. 120mm	
VGA Support	Max. 250mm	



HQ-01B-OP		HQ-
M/B Support	Mini ITX, mATX, ATX	
Drive Bay	ext.:2x 5.25" , 1x 3.5" / int.:3x 3.5"	
Power Supply	ATX PSU (optional)	
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)	
Cooling System	Front: 1x 120mm Rear: 2x 80mm Side: 2x 120mm	
Dimension	428mm x 160mm x 410mm (Stand +15mm)	
CPU Cooler Support	Max. 120mm	
VGA Support	Max. 250mm	

mATX



BD-25B-350GPB

BD-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB3.0 (USB3.1 Gen 1) Audio-out (AZALIA / HD-Audio), Mic-In
Cooling System	Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	395mm x 198mm x 376mm
CPU Cooler Support	Max. 165mm
VGA Support	Max. 340mm



CT-01B-350GPB

CT-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



CT-04B-350GPB

CT-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



HT-01B-350GPB

HT-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



LT-01B-350GPB

LT-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	1x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	425mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



XT-01B-350GPB

XT-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1x 90mm / 1x 120mm Rear: 1x 80mm / 1x 90mm / 1x 120mm
Dimension	408mm x 180mm x 352mm (Stand +3mm)
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



HO-11B-350GPB

HO-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 2x 3.5" / int.:3x 3.5", 2x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0 Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm
Dimension	368mm x 173mm x 365mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



HO-12B-350GPB

HO-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:2x 5.25", 1x 3.5" / int.:2x 3.5", 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0 Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm / 1x 90mm Rear: 1x 80mm / 1x 90mm
Dimension	368mm x 173mm x 365mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 340mm



UB-03B-350GPB

UB-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:1x5.25" , 1x3.5" / int.:3x 3.5" , 1x 2.5"
Power Supply	GPB-350S / 350Watt ATX 230V Only
Front I/O	2x USB3.2 Gen 1, Audio-out (AZALIA / HD-Audio), Mic-In, Reset, 1x USB Type C (480Mbit/s), SD card (480Mbit/s)
Cooling System	Front: 1x120mm Rear: 1x 80mm
Dimension	430mm x 207mm x 373mm
CPU Cooler Support	Max. 145mm
VGA Support	Max. 345mm



UE-02B

UE-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:1x 5.25" / int.:1x 3.5" , 2x 2.5"
Power Supply	SFX-250VS / 250Watt SFX 230V only
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	2x 80mm
Dimension	410mm x 105mm x 300mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 200mm



CI-01B-OP

CI-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:1x 5.25" , 1x 3.5" / int.:2x 3.5" , 3x 2.5"
Power Supply	ATX PSU (Optional, ~ 160mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 120mm / 1x 140mm Rear: 1x 120mm Top: 1x 120mm
Dimension	390mm x 265mm x 325mm (Stand +22mm)
CPU Cooler Support	Max. 150mm
VGA Support	Max. 320mm



BS-10B-300

BS-

M/B Support	Mini ITX, mATX (max. 244mm x 220mm)
Drive Bay	ext.:1x 5,25" Ultra Slim ODD Int.: 1x3.5" and 1x2.5" / 2x2.5"
Power Supply	GPF-300P / 300Watt TFX 80+Bronze
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-in, Audio-out (AZALIA / HD-Audio), 1xUSB Type C (480 Mbit/s), SD card slot
Cooling System	Rear: 1x 80mm
Dimension	290mm x 145mm x 343mm (Stand +2mm)
CPU Cooler Support	120mm
VGA Support	250mm



IX-06B-OP

IX-


M/B Support	Mini ITX, mATX (max. 244mm x 220mm)
Drive Bay	int.:2x 2.5"
Power Supply	AC-Power adapter
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	-
Dimension	265mm x 66mm x 300mm
CPU Cooler Support	35mm
VGA Support	-



CI-02B-OP

CI-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:1 x 5.25" , 1 x 3.5" / int.:2 x 3.5" ,3 x 2.5"
Power Supply	ATX PSU (Optional, ~ 160mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-In, Audio-out (AZALIA / HD-Audio), Reset
Cooling System	Front: 1x 120mm / 1x 140mm Rear: 1x 120mm Top: 1x 120mm / 1x 140mm
Dimension	357mm x 321mm x 448mm (Stand +22mm)
CPU Cooler Support	Max. 160mm
VGA Support	Max. 320mm



CS-12B-300

CS-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:1x 5.25" ,1x 3.5" / int.:1x 3.5" , 1x 2.5"
Power Supply	GPF-300P / 300Watt TFX 80+Bronze
Front I/O	2x USB3.0 (USB3.1 Gen 1), 2x USB2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm
Dimension	356mm x 102mm x 338mm
CPU Cooler Support	Max. 85mm
VGA Support	Max. 195mm



BE-10B-300

BE-

M/B Support	Mini ITX, mATX
Drive Bay	ext.:1x 5,25" Ultra Slim ODD Int.: 1x3.5" and 1x2.5" / 2x2.5"
Power Supply	GPF-300P / 300Watt TFX 80+Bronze
Front I/O	2x USB3.2 Gen 1 2x USB2.0 Audio-out (AZALIA / HD-Audio) Mic-in
Cooling System	Front: 1 x 80mm
Pre-installed	1x 80mm
Dimension	283mm x 95mm x 327mm
CPU Cooler Support	Max. 220mm
VGA Support	Max. 50mm



ITX



CN-01B-OP

CN-

M/B Support	Mini ITX
Drive Bay	ext.:1x 5.25" (1x 5.25" Slim Line in MK-35DV included) int.:3x 3.5" / 2x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.2 Gen 1, Audio-out (AZALIA / HD-Audio), Mic-in
Cooling System	Rear: 1x 120mm
Dimension	356mm x 260mm x 195mm
CPU Cooler Support	Up to 145mm (depending on 3.5" HDD installation)
VGA Support	230mm - 320mm (depending on PSU length)



BU-12B-300

BU-

M/B Support	Mini ITX
Drive Bay	ext.:1x 5.25" Ultra Slim Line int.:1x 3.5" , 1x 2.5"
Power Supply	GPF-300P / 300Watt TFX 80+Bronze
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio) SD card slot (Supports SD/MMC/MS card with transfer speed 480Mbps(9 pin USB2.0 internal connector))
Cooling System	Front: 1x 80mm(1x 80mm fan is pre-installed)
Dimension	290mm x 92,5mm x 280mm
CPU Cooler Support	Max. 65mm
VGA Support	Max. 150mm



BT-06B-250VS

BT-

M/B Support	Mini ITX
Drive Bay	int.:1x 3.5" , 2x 2.5"
Power Supply	SFX-250VS / 250Watt SFX 230V only
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-In, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm Rear: 2x 60mm
Dimension	240mm x 135mm x 323mm
CPU Cooler Support	Max. 110mm
VGA Support	Max. 190mm



IX-01B-OP

IX-

M/B Support	Mini ITX
Drive Bay	ext.: Optional (1x 5.25" Slim Line in MK-35DV included) int.:1x 3.5" , 1x 2.5"
Power Supply	AC-Power adapter
Front I/O	-
Cooling System	Front: 2x 50mm
Dimension	220mm x 197mm x 63mm
CPU Cooler Support	30mm
VGA Support	-



BT-02B-U3-250VS

BT-

M/B Support	mini ITX
Drive Bay	ext.:1x 5.25" / int.:1x 3.5" ,1x 2.5"
Power Supply	SFX-250VS / 250Watt SFX 230V only
Front I/O	2x USB3.0 (USB3.1 Gen 1), Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 1x 80mm Rear: 2x 60mm
Dimension	240mm x 135mm x 295mm
CPU Cooler Support	-
VGA Support	-



IX-03B-OP

IX-


M/B Support	mini ITX
Drive Bay	ext.:1x 5.25" (1x 5.25" Slim Line in MK-35DV included) int.:1x 3.5" / 1x 2.5"
Power Supply	AC-Power adapter
Front I/O	-
Cooling System	Front: 2x 50mm
Dimension	220mm x 197mm x 63mm
CPU Cooler Support	30mm
VGA Support	-



UNC-209SR-B-OP

M/B Support	mATX, ATX
Drive Bay	ext.:1x 5,25", 1x3,5" / int.:2x 3,5", 2x2,5"
Power Supply	PSF-400B / 400Watt ATX Full Range (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Front: 1x80mm Rear: 3x 80mm / 2x40mm
Dimension	457mm x 430mm x 88mm
CPU Cooler Support	Max. 60mm
VGA Support	Half Height

UNC-

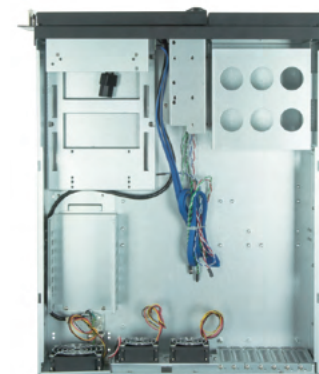

UNC-310A-B

M/B Support	mATX, ATX
Drive Bay	ext.:3x 5,25" , 1x 3,5" int.:4x 3,5"
Power Supply	PSF-400B / 400Watt tATX Full Range or installation of a mini redundant PSU with included mounting kit (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Rear: 2x 60mm + 1x 80mm (pre-installed)
Dimension	530mm x 483mm x 133mm
CPU Cooler Support	Max. 110mm
VGA Support	Max. 300mm


UNC-



UNC-210M-B

M/B Support	mATX, (Low profile PCI cards)
Drive Bay	ext.:1x 5.25", 1x 3.5" int.:3x 3.5"
Power Supply	PSF-400B / 400Watt tATX Full Range or installation of a mini redundant PSU with included mounting kit (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Front: 2x 80mm (pre-installed)
Dimension	430mm x 480mm x 88mm
CPU Cooler Support	Max. 60mm
VGA Support	Half Height

UNC-



UNC-409S-B

M/B Support	mATX, ATX
Drive Bay	ext.:3x 5.25", 1x 3.5" int.:2x 3.5", 3x 2.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a 1+1 redundant PSU with included mounting kit
Front I/O	2x USB3.0 (USB3.2 Gen 1)
Cooling System	Front: 2x 120mm Rear: 2x 80mm
Dimension	482mm x 480mm x 177.5mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 350mm


UNC-



UNC-210T-B-U3

M/B Support	mATX, ATX
Drive Bay	ext.:1x 5,25" / int.:4x 3,5"
Power Supply	PSF-400B / 400Watt ATX Full Range (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Rear: 3x 80mm (pre-installed)
Dimension	557mm x 483mm x 89mm
CPU Cooler Support	Max. 65mm
VGA Support	Half Height

UNC-

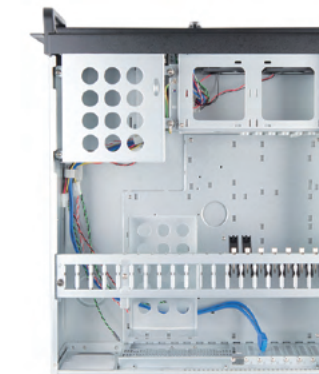

UNC-410S-B-U3

M/B Support	mATX, ATX (CEB 1.01)
Drive Bay	ext.:3x 5,25" / 1x 3,5" int.:4x 3,5"
Power Supply	Standard ATX PSU or installation of a mini redundant PSU (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Front : 2x 90mm (pre installed)
Dimension	505mm x 483mm x 178mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 330mm

UNC-



UNC-210TR-B-U3

M/B Support	mATX, ATX
Drive Bay	ext.:1x 5,25" int.:4x 3,5"
Power Supply	PSF-400B / 400Watt tATX Full Range (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Rear: 3x 80mm (pre-installed)
Dimension	557mm x 483mm x 89mm
CPU Cooler Support	Max. 65mm
VGA Support	Half Height

UNC-



UNC-411E-B

M/B Support	mATX, ATX, EATX
Drive Bay	ext.:6x 5.25", 3x 3.5", 1x 5.25" slim line ODD int.:2x 3.5"
Power Supply	PSF-400B (400W) Standard ATX PSU or installation of a mini redundant PSU with included mounting kit (not included)
Front I/O	2x USB3.0 (USB3.1 Gen 1)
Cooling System	Front: 1x 120mm Rear: 2x 80mm
Dimension	600mm x 485mm x 177,5mm
CPU Cooler Support	Max. 140mm
VGA Support	Max. 330mm

UNC-

Class
02

The heart
of computer
PSUs

- ATX
- SFX
- TFX
- External
- Redundant

ATX



Polaris PPS-550FC, PPS-650FC, PPS-750FC

PPS-

Power	550W, 650W, 750W
Efficiency	80PLUS® GOLD
AC Input	Full Range
PSU Length	140mm
Fan	120mm silent fan



PPS-850FC, PPS-1050FC, PPS-1250FC

Power	850W, 1050W, 1250W
Efficiency	80PLUS® GOLD
AC Input	Full Range
PSU Length	160mm
Fan	140mm silent fan



Core BBS-500S, BBS-600S, BBS-700S

BBS-

Power	500W, 600W, 700W
Efficiency	80PLUS® GOLD
AC Input	Full Range
PSU Length	140mm
Fan	120mm silent fan



Proton BDF-400S, BDF-500S, BDF-600S

BDF-

Power	400W, 500W, 600W
Efficiency	80PLUS® BRONZE
AC Input	Full Range
PSU Length	140mm
Fan	120mm silent fan



BDF-650C, BDF-750C, BDF-850C, BDF-1000C

Power	650W, 750W, 850W, 1000W
Efficiency	80PLUS® BRONZE
AC Input	Full Range
PSU Length	160mm
Fan	140mm silent fan



**Task** TPS-400S, TPS-500S, TPS-600S, TPS-700S

Power	400W, 500W, 600W, 700W
Efficiency	80PLUS* BRONZE
AC Input	Full Range
PSU Length	140mm
Fan	120mm silent fan

TPS-**A80** CTG-550C, CTG-650C, CTG-750C

Power	550W, 650W, 750W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan

CTG-**Silicon** SLC-650C, SLC-750C, SLC-850C, SLC-1000C

Power	650W, 750W, 850W, 1000W
Efficiency	80PLUS* BRONZE
AC Input	Full Range
PSU Length	160mm
Fan	140mm silent fan

SLC-**ECO** GPE-400S, GPE-500S, GPE-600S, GPE-700S

Power	400W, 500W, 600W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan

GPE-**Photon Gold** GDP-650C-RGB, GDP-750C-RGB

Power	650W, 750W
Efficiency	>90%
AC Input	230V Only
PSU Length	160mm
Fan	140mm silent ARGB Rainbow fan

GDP-RGB**Smart** GPS-400A8, GPS-500A8, GPS-550A8, GPS-600A8, GPS-650A8, GPS-700A8

Power	400W, 500W, 550W, 600W, 650W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan

GPS-**A90** GDP-550C, GDP-650C, GDP-750C

Power	550W, 650W, 750W
Efficiency	>90%
AC Input	230V Only
PSU Length	160mm
Fan	140mm silent fan

GDP-**Element** ELP-350S, ELP-400S, ELP-500S, ELP-600S, ELP-700S

Power	350W, 400W, 500W, 600W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan

ELP-**Photon** CTG-650C-RGB, CTG-750C-RGB

Power	650W, 750W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent ARGB Rainbow fan

CTG-RGB**Force** CPS-350S, CPS-400S, CPS-450S, CPS-500S, CPS-550S, CPS-650S, CPS-750S

Power	350W, 400W, 450W, 500W, 550W, 650W, 750W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan

CPS-



Value APB-400B8, APB-500B8, APB-600B8, APB-7 00B8 **APB-**

Power	400W, 500W, 600W, 700W
Efficiency	80PLUS* WHITE
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan



Solid GPP-400S, GPP-500S, GPP-600S, GPP-700S **GPP-**

Power	400W, 500W, 600W, 700W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan



iArena GPA-350S8, GPA-400S8, GPA-450S8, GPA-500S8 **GPA-**

Power	350W, 400W, 450W, 500W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan



GPA-550S, GPA-600S, GPA-650S, GPA-700S

Power	550W, 600W, 650W, 700W
Efficiency	<80%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan



GPB-350S, GPB-400S, GPB-450S, GPB-500S **GPB-**

Power	350W, 400W, 450W, 500W
Efficiency	>85%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan



GPC-400S, GPC-500S, GPC-600S, GPC-700S **GPC-**

Power	400W, 500W, 600W, 700W
Efficiency	80%
AC Input	230V Only
PSU Length	140mm
Fan	120mm silent fan



Smart PSF-400B **PSF-**

Power	400W
Efficiency	>85%
AC Input	Full Range
PSU Length	140mm
Fan	80mm silent fan



SFX



Compact CSN-450C, CSN-550C, CSN-650C **CSN-**

Power	450W, 550W, 650W
Efficiency	80PLUS* GOLD
AC Input	Full Range
PSU Length	100mm
Fan	80mm silent fan



Smart BFX-350BS, BFX-450BS **BFX-**

Power	350W, 450W
Efficiency	80PLUS* Bronze
AC Input	230V Only
PSU Length	100mm
Fan	90mm silent fan



Smart SFX-250VS **SFX-**

Power	250W
Efficiency	>85%
AC Input	230V Only
PSU Length	100mm
Fan	80mm silent fan



TFX



TFX GPF-300P	
Power	300W
Efficiency	80PLUS* BRONZE
AC Input	Full Range
PSU Length	175mm
Fan	80mm silent fan

GPF-

BULK



GPF-350P, GPF-400P	
Power	350W, 400W
Efficiency	>85%
AC Input	Full Range
PSU Length	175mm
Fan	80mm silent fan



BULK

Class

03

Details make computer Perfect

Accessories

Cooling

Backplanes

External box

Docking station


USB Hub

External



External PSU CDP-85ITX, CDP-120ITX	
Power	85W, 120W
Efficiency	87%
AC Input	Full Range

CDP-

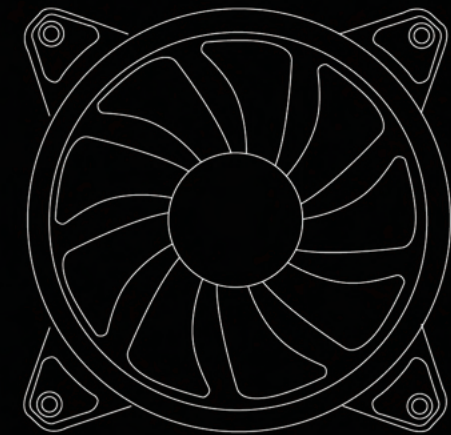

Cooling



TORNADO | CF-3012-RGB

Connector	6 pin	CF-
Fan speed	1200 rpm	
Dimension	120mm x 120mm x 25mm	
Air Flow	53 CFM	
Noise Level	16 dBA	
Lighting mode	20x dynamic modes / 9x static modes (in combination with our DF-908 control board)	
LED Type	Addressable RGB	



CF-1225RGB



Connector	6 pin	CF-
Fan speed	1200 rpm	
Dimension	120mm x 120mm x 25mm	
Air Flow	53 CFM	
Noise Level	16 dBA	
Lighting mode	20x dynamic modes / 9x static modes (in combination with our DF-908 control board)	
LED Type	Addressable RGB	



AF-12RGB



Connector	6 pin	AF-
Fan speed	1200 rpm	
Dimension	120mm x 120mm x 25mm	
Air Flow	53 CFM	
Noise Level	16 dBA	
Lighting mode	20x dynamic modes / 9x static modes (in combination with our DF-908 control board)	
LED Type	Addressable RGB	



AF-0625S, AF-0825S, AF-0925S, AF-1225S

Connector	3 PIN Connector / Molex	AF-
Dimension / Fan speed	AF-0625S - 60mm x 60mm x 25mm - 2200 rpm	
	AF-0825S - 80mm x 80mm x 25mm - 2000 rpm	
	AF-0925S - 90mm x 90mm x 25mm - 1800 rpm	
	AF-1225S - 120mm x 120mm x 25mm - 1350 rpm	

AF-0825PWM, AF-0925PWM, AF-1225PWM

Connector	4 PIN PWM Connector / Molex	AF-PWM
Dimension / Fan speed	AF-0825PWM - 80mm x 80mm x 25mm - 3000 rpm	
	AF-0925PWM - 90mm x 90mm x 25mm - 2600 rpm	
	AF-1225PWM - 120mm x 120mm x 25mm - 1650 rpm	



Backplanes

CMR-125



Interface	SATA I/II/III	CMR-
Dimension	138mm x 79mm x 11mm	
Form factor	1x PCI Slot bay for 1x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm)	
Cooling	--	
Power Connector	1 x SATA	
Data Interface(ext.)	1 x SATA	

CMR-425



Interface	SATA I/II/III	CMR-
Dimension	1168mm x 146mm x 42mm	
Form factor	1x 5,25" bay for 4x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm)	
Cooling	--	
Power Connector	1 x Molex	
Data Interface(ext.)	4 x SATA	

CMR-2131SAS



Interface	SATA, SAS I/II/III	CMR-
Dimension	217mm x 146mm x 85mm	
Form factor	2x 5,25" bays for 3x SATA/SAS HDDs/SSDs (3,5"/2,5")	
Cooling	80mm fan	
Power Connector	2 x Molex	
Data Interface(ext.)	3 x SATA	
Data transfer rate	Speed up to 12Gbps	

CBP-2131SAS



Interface	SATA I/II/III, SAS I/II	CBP-
Dimension	207mm x 146mm x 86mm	
Form factor	2x 5,25" bays for 3 HDDs/SSDs (3,5" or 2,5")	
Cooling	70mm fan	
Power Connector	2 x SATA	
Data Interface(ext.)	3 x SATA	
Data transfer rate	Up to 6Gbps (SATA III / SAS)	

CMR-225



Interface	SATA I/II/III	CMR-
Dimension	1137mm x 102mm x 26mm	
Form factor	1x 3,5" bay for 2x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm)	
Cooling	--	
Power Connector	1 x SATA	
Data Interface(ext.)	2 x SATA	

CMR-625



Interface	SATA I/II/III	CMR-
Dimension	1168mm x 146mm x 42mm	
Form factor	1x 5,25" bay for 6x 2,5" HDDs/SSDs (max. HDD/SSD height up to 9,5mm)	
Cooling	40mm fan	
Power Connector	1 x Molex	
Data Interface(ext.)	6 x SATA	

CMR-3141SAS



Interface	SATA, SAS I/II/III	CMR-
Dimension	217mm x 146mm x 126mm	
Form factor	3x 5,25" bays for 4x SATA/SAS HDDs/SSDs (3,5"/2,5")	
Cooling	80mm fan	
Power Connector	2 x Molex	
Data Interface(ext.)	4 x SATA	
Data transfer rate	Speed up to 12Gbps	

CBP-3141SAS



Interface	SATA I/II/III, SAS I/II	CBP-
Dimension	202mm x 146mm x 126mm	
Form factor	3x 5,25" bays for 4x SATA/SAS HDDs/SSDs (3,5" or 2,5")	
Cooling	80mm fan	
Power Connector	2 x SATA	
Data Interface(ext.)	4 x SATA	
Data transfer rate	Up to 6Gbps (SATA III / SAS)	

External Box

CEB-2511-U3



Form factor	1x 2.5" (SATA-HDD/SSD, max. Height 12,5mm)
Dimension	135mm x 85mm x 15mm
Power	via USB 3.0 Data Cable
Data transfer rate	Up to 5 GBit/s (USB 3.2 Gen1)
USB Interface(ext.)	USB 3.2 Gen1 Type-A

CEB-


CEB-M2C



Form factor	M.2 PCI-E NVME SSD (M & B+M Key) 2230/2242/2260/2280
Dimension	108mm x 38mm x 14mm
Power	via Type-C Data Cable
Data transfer rate	Up to 10 GBit/s (USB 3.2 Gen2)
USB Interface(ext.)	USB 3.2 Gen2 Type-C

CEB-

CEB-M2C-TL



Form factor	M.2 PCI-E NVME SSD (M & B+M Key) 2230/2242/2260/2280
Dimension	104.3mm x 36.3mm x 13.4mm
Power	via Type-C Data Cable
Data transfer rate	Up to 10 GBit/s (USB 3.2 Gen2)
USB Interface(ext.)	USB 3.2 Gen2 Type-C

CEB-

Docking station

DSC-502



Dimension	103mm x 35mm x 13mm
Data Transfer rate	Up to 5 GBit/s (USB 3.2 Gen1)
Ports	2x USB 3.2 Gen1 Type-A (5 Gbps) 1x USB 3.2 Gen1 Type-C (5 Gbps) 1x HDMI (4K@30Hz) 1x USB Type-C for PD3.0 Charging (up to 80W)
Connector	USB 3.2 Gen1 Type-C

DSC-

DSC-901



Dimension	134mm x 49mm x 15mm
Data transfer rate	Up to 5 GBit/s (USB 3.2 Gen1)
Ports	2x USB 3.2 Gen1 Type-A (5 Gbps) 1x USB 3.2 Gen1 Type-C (5 Gbps) 1x HDMI (4K@30Hz) 1x Audio socket (need to connect HDMI output to support audio output) 1x USB Type-C for PD3.0 Charging (up to 80W) 1x SD card slot (480Mbit/s) 1x TF card slot (480Mbit/s) 1x LAN Ethernet (up to 1 Gbps)
Connector	USB 3.2 Gen1 Type-C

DSC-

MUB-3002



Dimension	101mm x 25mm x 137mm
Form Factor	3.5" external drive bay
Internal Interface	1x USB 3.1 Gen1 (5 Gbps)
External Interface	2x Type-A Interface up to 5 GBit/s (USB 3.1 Gen1)

MUB-

MUB-3003C



Dimension	102.0mm x 25.3mm x 135.2mm
Form Factor	3.5" external drive bay
Internal Interface	1x USB 3.1 Gen1 (5 Gbps) 1x USB 3.1 Gen2 (10 Gbps)
External Interface	1x USB Type-C Interface up to 10 GBit/s (USB 3.1 Gen2) 2x Type-A Interface up to 5 GBit/s (USB 3.1 Gen1)

MUB-

Card Reader

CRD-908H



Dimension	135.2mm x 102 mm x 25.3mm
Form Factor	3.5" external drive bay
Internal Interface	USB 3.2 Gen1 Socket (5 Gbps)
External Interface	2x USB 3.2 Gen1 Type-A (5 Gbps) 2x USB 3.2 Gen1 Type-C (5 Gbps) 1x USB Type-A for QC3.0 Charging 1x USB Type-C for PD3.0 & QC3.0 Charging 1x SD 3.0 card slot 1x MicroSD 3.0 card slot
Power	via Molex

CRD-

Chieftronic will build on the legacy of our Chieftec heritage of quality and experience in the PC chassis industry, while bringing in fresh and innovative design features, thus meeting the high demands of gamers and modern power-users.

CASE

PSU

ACCESSORIES



G1 GR-01B-OP

M/B Support	mITX, mATX, ATX
Drive Bay	int.:2x 3.5" , 4x 2.5"
Power Supply	ATX PSU (optional, 140mm - 200mm)
Front I/O	2x USB3.0 (USB3.1 Gen 1), 1x USB2.0, Audio-out (AZALIA / HD-Audio)
Cooling System	Front: 2x120mm / 2x140mm / 1x280mm Rear: 1x 120mm Bottom: 3x 120mm / 1x 360mm
Pre-installed	1x 120mm RGB Fan
Dimension	502mm x 210mm x 476mm
CPU Cooler Support	Max. 160mm
VGA Support	Max. 400mm



M1 GM-01B-OP

M/B Support	mITX, mATX
Drive Bay	int.:2x 2.5" , 2x 3.5"
Power Supply	ATX PSU (optional, 140mm - 160mm)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front:2x120mm / 2x140mm / 1x280mm Rear: 1x 120mm / 1x 140mm
Pre-installed	1x 120mm ARGB Fan
Dimension	400mm x 270mm x 345mm
CPU Cooler Support	Max. 180mm
VGA Support	Max. 320mm



M2 GM-02B-OP

M/B Support	mITX, mATX
Drive Bay	int.:2x 2.5" , 2x 3.5"
Power Supply	ATX PSU (optional, 140mm - 160mm)
Front I/O	2x USB 3.0 (USB 3.1 Gen 1), 2x USB 2.0, Mic-in, Audio-out (AZALIA / HD-Audio)
Cooling System	Front:2x120mm / 2x140mm / 1x280mm Rear: 1x 120mm / 1x 140mm Top: 2x 120mm / 240mm
Pre-installed	Front: 2x 120mm ARGB Fan Rear: 1x 120mm ARGB Fan
Dimension	398mm x 273mm x 345mm (Stand :10mm)
CPU Cooler Support	Max. 200mm
VGA Support	Max. 340mm



PowerPlay Gold GPU-550FC, GPU-650FC, GPU-750FC

Power	550W, 650W, 750W
Efficiency	80PLUS® GOLD
AC-Input	Full Range
PSU Length	160 mm
Fan	140mm silent fan



PowerPlay Platinum GPU-850FC, GPU-1050FC, GPU-1200FC

Power	850W, 1050W, 1200W
Efficiency	80PLUS® Platinum
AC-Input	Full Range
PSU Length	160 mm
Fan	140mm silent fan



PowerUP GPX-550FC, GPX-650FC, GPX-750FC, GPX-850FC

Power	550W, 650W, 750W, 850W
Efficiency	80PLUS® GOLD
AC-Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan



SteelPower BDK-550FC, BDK-650FC, BDK-750FC

Power	550W, 650W, 750W
Efficiency	80PLUS® Bronze
AC-Input	Full Range
PSU Length	140 mm
Fan	120mm silent fan



HALO MP-800-ARGB

Connector	A-RGB 3-PIN (+5V)
Dimension (mm)	800mm x 300mm x 4mm
Material	Plastic, Cloth, Natural Rubber
Cable Length	2.7 m
LED Type	Addressable RGB



NOVA NF-1225RGB

Connector	Fan: 4 pin PWM / ARGB: 3 pin
Fan speed	1600 RPM \pm 10%
Dimension	120mm x 120mm x 25mm
Air Flow	68 CFM
Noise Level	24 dBA (Max: 28)
LED Lamp	32 pcs (Inner Ring: 16 pcs ; Outer Ring: 32pcs)
LED Type	Addressable RGB



NOVA Set NF-3012-RGB

Connector	Fan: 4 pin PWM / ARGB: 3 pin
Fan speed	1600 RPM \pm 10%
Dimension	120mm x 120mm x 25mm
Air Flow	68 CFM
Noise Level	24 dBA (Max: 28)
LED Lamp	32 pcs (Inner Ring: 16 pcs ; Outer Ring: 32pcs)
LED Type	Addressable RGB

