



USB 3.0 to VGA adapter



Manual DA-70840 Rev. 2

Description

DIGITUS USB 3.0 to VGA Adapter, resolution up to 1920x1080 @60Hz, extend and mirror mode support

The DIGITUS USB 3.0 to VGA Adapter extends your workspace with an additional monitor, TV or projector via the USB interface. You can use two graphic adapters simultaneously on the PC and add or remove a monitor without rebooting the system. This adapter supports resolutions up to 1920x1080, video streaming up to 1080p. The USB 3.0 to VGA adapter impresses with its elegant black housing and without additional installation of graphics cards. The power supply runs through an USB port, so there's no additional external power supply needed.

Feature

- Compliant with USB3.0 Specification Revision 1.0
- Compliant with Universal Serial Bus Device Class Definition for Audio/Video Devices (USB A/V)
- USB upstream port supporting SS/HS data rate (5Gbps/480Mbps)
- Video output up to 1920x1080@60Hz in USB 3.0 application (Video output 800x600 in USB 2.0 application)
- Supports USB Plug and Play (PNP)
- WHCK/WHQL certified driver support for Windows 7, 8 and 10
- Support Windows Aero Effects

Package content

1. USB3.0 Graphic adapter
2. Quick Installation Guide

System Requirement:

Intel i3 2.5GHz or Higher

4GB DDR3 SDRAM

Operating System: Windows 7 and above




Installation

1. Connect DA-70840 USB port to computer
2. New USB flash driver will be found
3. Install the driver (.exe file) and reboot the computer.
4. Connect HDMI connector to monitor

PS: If there is new OS version released, please go to website <http://www.business.assmann.com/> and download new driver.

Connection Diagram

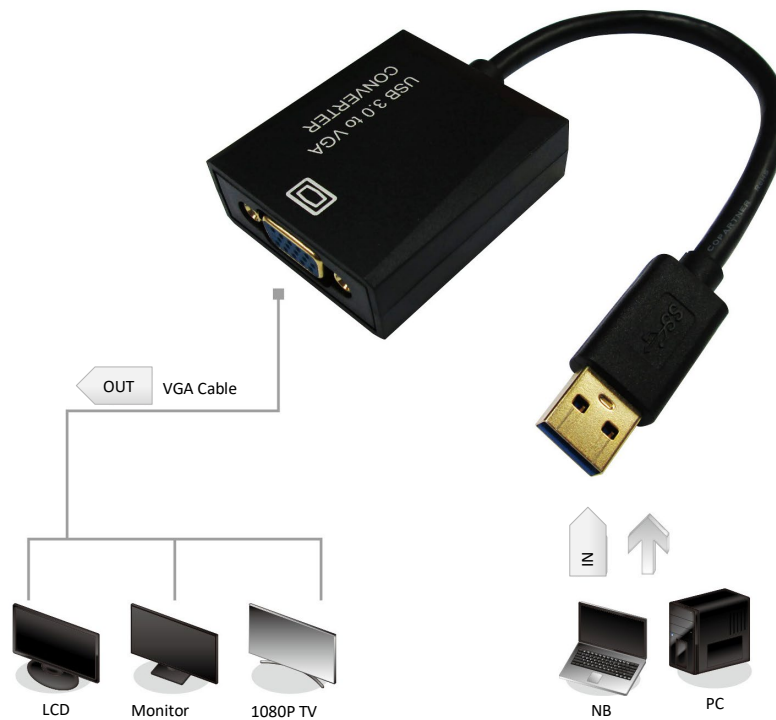

Hereby Assmann Electronic GmbH, declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com

Assmann Electronic GmbH

Auf dem Schüffel 3

58513 Lüdenscheid

Germany

