

# AX3000 Whole Home Mesh Wi-Fi System

## Model: Halo H80X

### // Highlights


- 3000 Mbps Dual Band Wi-Fi
- Seamless Roaming with One Wi-Fi Name
- Connect over 150 Devices
- Easy App Control
- Expand Coverage with Halo H Models



# Wi-Fi 6

Seamless Coverage up to


**5000**ft<sup>2</sup> | **460**m<sup>2</sup>



## // Applications



Ideal for large homes with multiple rooms and multiple users

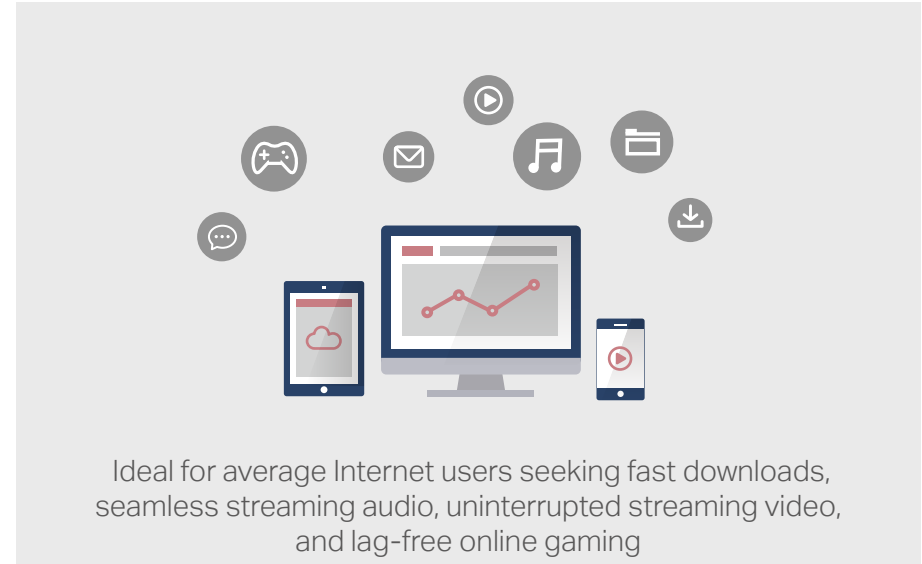

Ideal for average Internet users seeking fast downloads, seamless streaming audio, uninterrupted streaming video, and lag-free online gaming

## // Features

### Fast Wi-Fi 6 for an Upgraded Network Experience

Armed with Wi-Fi 6, Halo H80X improves virtually every aspect of your network, especially when it comes to speed, efficiency, and capacity.



**1024-QAM**  
Boosts raw speeds by 25% compared with 256-QAM.



**MU-MIMO**  
Connect more devices simultaneously.



**OFDMA**  
Delivers greater network capacity and efficiency.



**BSS Color**  
Marks frames from neighboring networks to increase efficiency.



**160 MHz Channels**  
Double channel width for faster connections.

## // A Whole Home Wi-Fi Solution

Halo works as a unified system to guarantee a strong Wi-Fi signal in every corner of your home. Mercusys Mesh Technology provides an incredibly fast and stable user experience when you walk around your home. Interruption and buffering will be a thing of the past.




**Whole Home Coverage**  
Eliminate weak signal areas with clearer, stronger whole home Wi-Fi.



**Seamless Roaming**  
Choose the best signal and enjoy the best connections.



**One Unified Network**  
Run a single home network with one Wi-Fi name and password.

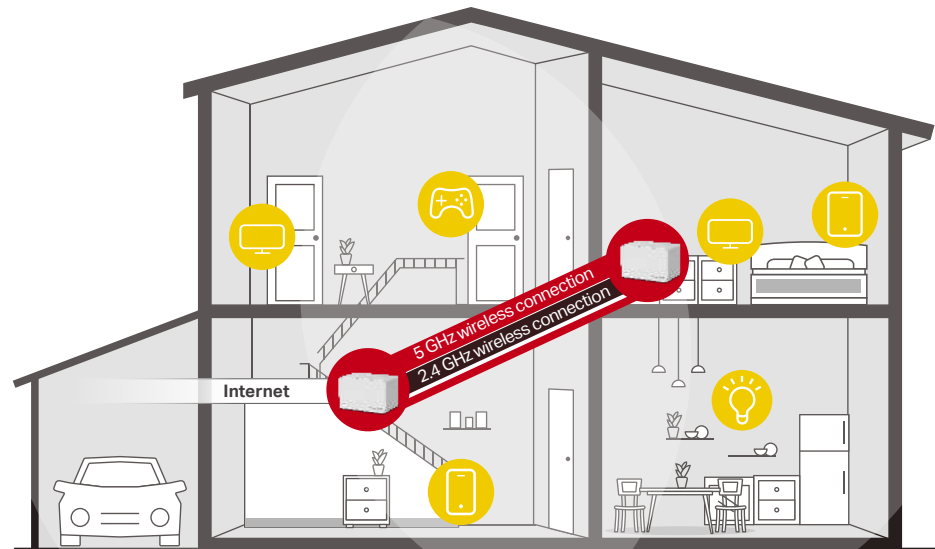

**Connects over 150 Devices**  
Halo keeps your phones, computers, and all IoT devices connected simultaneously.



**Quality of Service (QoS)**  
Prioritize select devices to perform better.



**Parental Controls**  
Set access control and time limits to better manage your family's online habits.

## // Specifications

### Hardware

#### Ports

3× Gigabit Ports per Halo Unit  
 (WAN/LAN auto-sensing)

#### Button

Reset button

#### Dimensions (W x D x H)

5×3.2×3.3 in (128×81×83.7 mm)

### Wireless

#### Wireless Standards

IEEE 802.11 a/n/ac/ax 5 GHz, IEEE 802.11 b/g/n/ax 2.4 GHz

#### Signal Rate

2402 Mbps on 5 GHz, 574 Mbps on 2.4 GHz

#### Mesh protocol

802.11k/v/r

#### EIRP

2.4 GHz < 20dBm (EIRP)

5 GHz < 23dBm (EIRP)

#### Reception Sensitivity

2.4GHz:

11g 6Mbps:-96.5dBm

11g 54Mbps:-78dBm

11AX HE20 MCS0:-96.5dBm

11AX HE20 MCS11:-65dBm

11AX HE40 MCS0:-93.5dBm

11AX HE40 MCS11:-63dBm

5GHz:

11a 6Mbps:-96dBm

11a 54Mbps:-78dBm

11ac VHT20 MCS8:-74.5dBm

11ac VHT40 MCS9:-70.5dBm

11ac VHT80 MCS9:-66.5dBm

11AX HE20 MCS11:-66dBm

11AX HE40 MCS11:-63dBm

11AX HE80 MCS11:-61dBm

### Software

#### Working Mode

Router, Access Point

#### WAN Type

Dynamic IP/Static IP/PPPoE/L2TP/PPTP

#### DHCP

Server, Client

#### Protocols

Supports IPv4 and IPv6

#### Guest Network

2.4 GHz Guest Network x 1,

5 GHz Guest Network x 1

#### Features

Parental Controls, QoS (Quality of Service),  
 Monthly Report Assisted Setup, Address  
 Reservation, Port Forwarding, Mercusys DDNS,  
 VLAN, IPv6, LED Control

#### Management

Local Management, Remote Management,  
 Multi-Managers

#### Wireless Security

WPA-PSK/WPA2-PSK/WPA3

## // Specifications

### Others

---

#### Environment

Operating Temperature: 0°C~40°C (32°F~104°F)

Operating Humidity: 10%~90% Non-Condensing

Storage Humidity: 5%~90% Non-Condensing

#### Package Contents for Halo H80X (2-pack):

2× Halo H80X Units

1× RJ45 Ethernet Cable

2× Power Adapters

1× Quick Installation Guide

\*Seamless roaming requires clients to support 802.11k/v/r and may require additional setup. Performance may vary depending on the client device.

\*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

\*Use of Wi-Fi 6 and other features including OFDMA, MU-MIMO, 1024-QAM, HE160, BSS Color, TWT require clients to also support the corresponding features. The 160 MHz bandwidth may be unavailable in the 5 GHz band in some regions/countries due to regulatory restrictions. This product may not support all the mandatory features of IEEE 802.11AX specifications. Further software upgrades for feature availability may be required.

\*Use of WPA3 requires clients to also support WPA3.

\*Please note that the Halo H series and S series cannot work together. Halo H80X is compatible with other units from the Halo H series to form a Mesh network.

\*All WAN/LAN ports will operate as either WAN or LAN ports. Only one port can serve as a WAN port at a time.

© 2022 MERCUSYS