

EB2 400/3L 400A 3p



Особенности

Артикул	004671092
Наименование	EB2 400/3L 400A 3p
Вес	4.2
Группа	Автоматические выключатели EB2 20-1600A
Типоразмер	400A
Назначение	Промышленные автоматические выключатели
Номинальный ток (A)	400
Тепловая/электромагнитная защита	0,63-1/6-12
Отключающая способность (kA)	25/25

Веб-страница продукта 

Другая документация



CE сертификат

Каталог технических данных




ETIM международная спецификация

Number of auxiliary contacts as normally open contact	
Number of auxiliary contacts as normally closed contact	
Rated permanent current Iu	400A
Number of poles	3
Overload release current setting	252-400A
Number of auxiliary contacts as change-over contact	
Degree of protection (IP)	IP20
Position of connection for main current circuit	EV009502
Motor drive integrated	false
Type of electrical connection of main circuit	Screw connection
Type of control element	Rocker lever
Switched-off indicator available	true
Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	25kA
Adjustment range short-term delayed short-circuit release	A
Adjustment range undelayed short-circuit release	2400-4800A
Suitable for DIN rail (top hat rail) mounting	
Integrated earth fault protection	
Motor drive optional	true


With under voltage release	
Device construction	Built-in device fixed built-in technique

Токо – временные характеристики

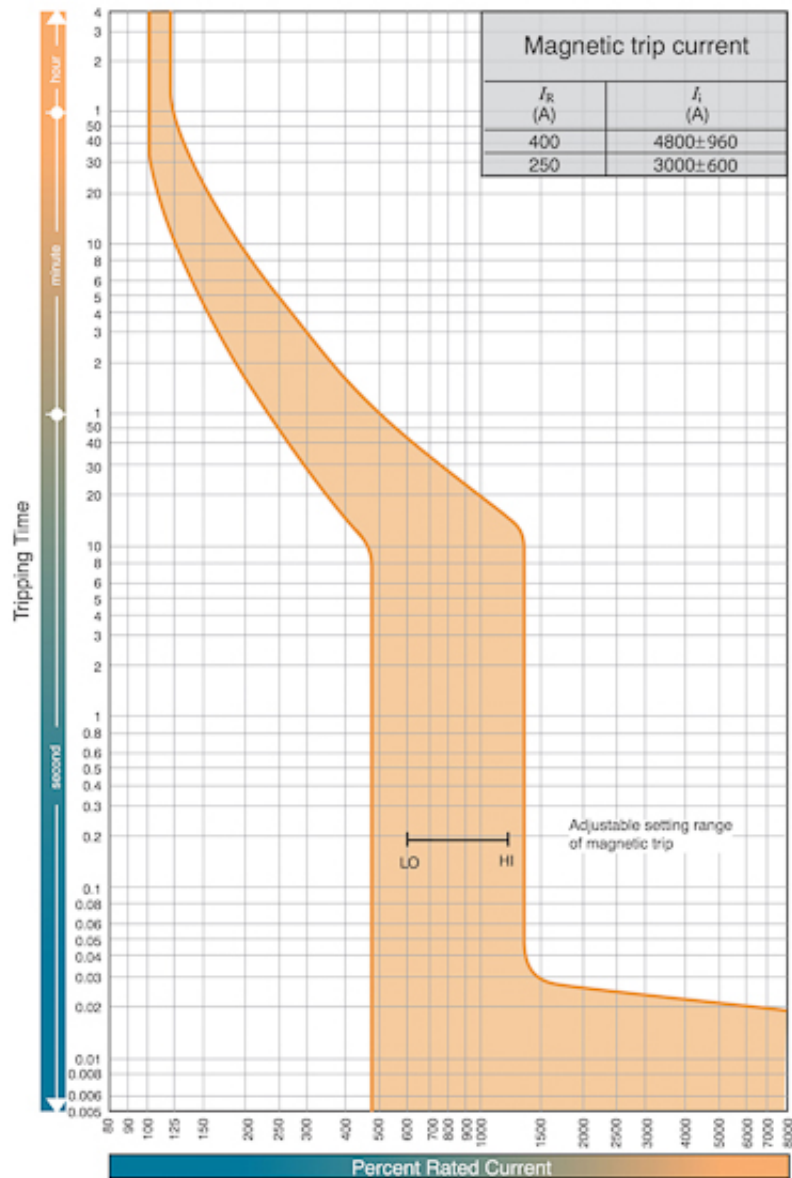

Габаритные размеры

Front connected

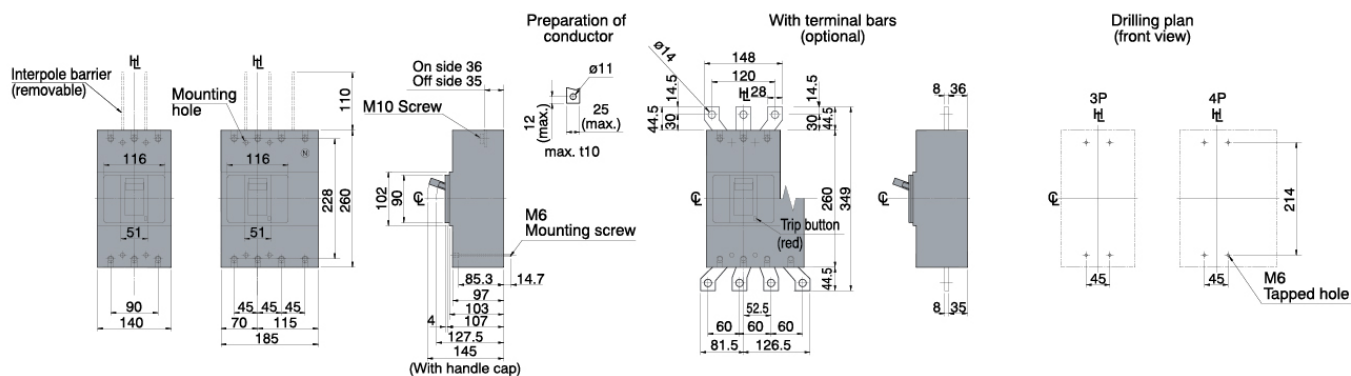

Rear connected

